

PD-DIN

Bent Axis Pumps




DIN Mounting Flange, Flange, 4 Bolt, 12cc to 130cc

DIN Mounting Flange, High Pressure Bent Axis Piston Pumps. Bi-Directional Rotation.
Displacement Range starting at; 12cc, 18cc, 25cc, 32cc, 40cc, 50cc, 63cc, 80cc, 108cc, 130cc
High Rotational Speed, High Pressure, Slim Design, High Efficiency.



Ordering Code of PD-DIN Pumps

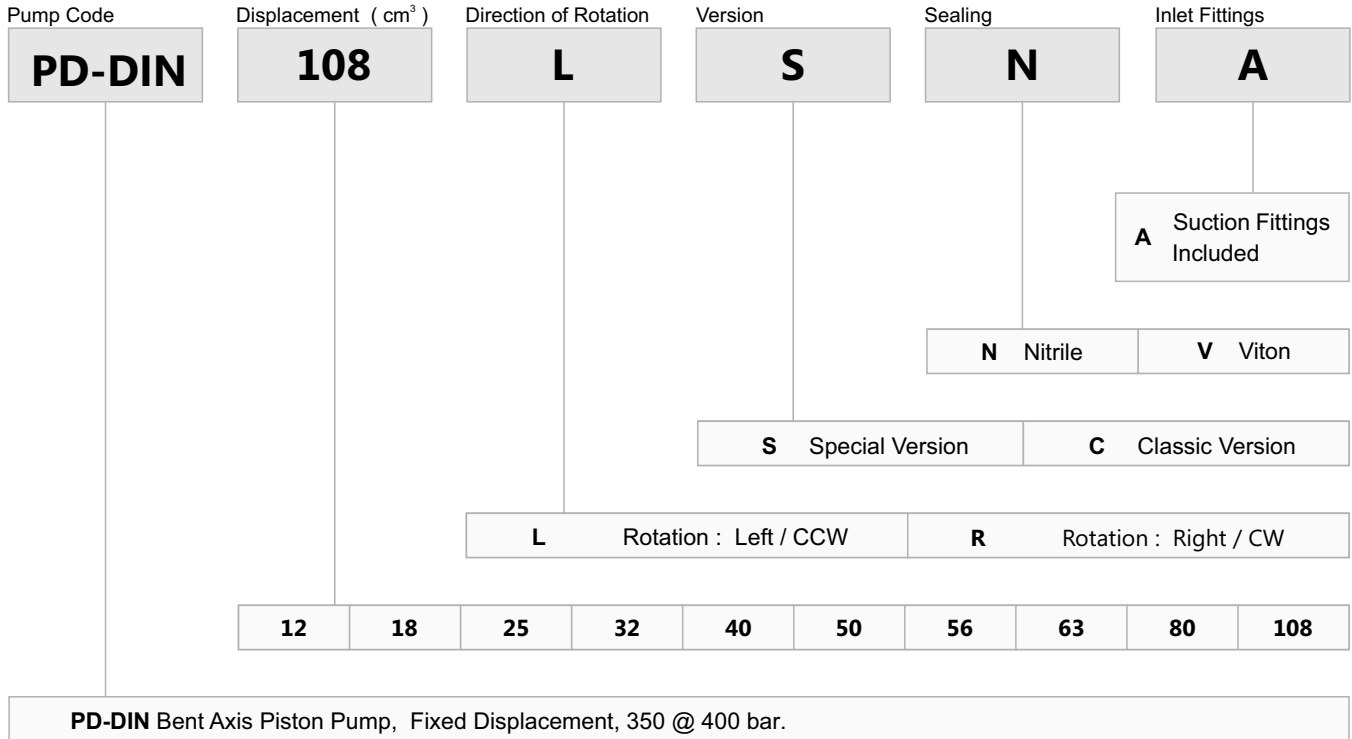


Classic Version ; Default design
Special Version ; Special for dealers

Formulas			
Pump Output Flow	GPM	$GPM = (\text{Speed (rpm)} \times \text{disp. (cu. in.)}) / 231$	$GPM = (n \times d) / 231$
Pump Input Horsepower	HP	$HP = GPM \times \text{Pressure (psi)} / 1714 \times \text{Efficiency}$	$HP = (Q \times P) / 1714 \times E$
Pump Efficiency	E	Overall Efficiency = Output HP / Input HP	$E_{\text{Overall}} = \text{HPOut} / \text{HPIn} \times 100$
		Overall Efficiency = Volumetric Eff. \times Mechanical Eff.	$E_{\text{Overall}} = \text{EffVol.} \times \text{EffMech.}$
Pump Volumetric Efficiency	E	Volumetric Efficiency = Actual Flow Rate Output (GPM) / Theoretical Flow Rate Output (GPM) \times 100	$\text{EffVol.} = \text{QAct.} / \text{QTheo.} \times 100$
Pump Mechanical Efficiency	E	Mechanical Efficiency = Theoretical Torque to Drive / Actual Torque to Drive \times 100	$\text{EffMech} = \text{TTheo.} / \text{TAct.} \times 100$
Pump Displacement	CIPR	$\text{Displcmnt (In.}^3 \text{ / rev.)} = \text{Flow Rate (GPM)} \times 231 / \text{Pump RPM}$	$\text{CIPR} = \text{GPM} \times 231 / \text{RPM}$
Pump Torque	T	Torque = Horsepower \times 63025 / RPM	$T = 63025 \times \text{HP} / \text{RPM}$
		Torque = Pressure (PSIG) \times Pump Displacement (CIPR) / 2π	$T = P \times \text{CIPR} / 6.28$

- Horsepower for driving a pump** : For every 1 hp of drive, the equivalent of 1 gpm @ 1500 psi can be produced.
- Horsepower for idling a pump** : To idle a pump when it is unloaded will require about 5% of it's full rated power
- Wattage for heating hydraulic oil** : Each watt will raise the temperature of 1 gallon of oil by 1° F. per hour.
- Flow velocity in hydraulic lines** : Pump suction lines 2 to 4 feet per second, pressure lines up to 500 psi - 10 to 15 ft./sec., pressure lines 500 to 3000 psi - 15 to 20 ft./sec.; all oil lines in air-over-oil systems; 4 ft./sec.

Technical Data I


		12	18	25	32	40	50	56	63	80	108
Displacement	cc	12,00	18,00	25,00	32,00	40,20	50,00	56,40	63,00	80,00	108,4
Theoretical oil flow l/min at pump speed	1000 rpm	12,00	18,00	25,00	32,00	40,20	50,00	56,40	63,00	80,00	108,4
	1500 rpm	18,00	27,00	37,50	48,00	60,30	75,00	84,60	94,50	120,0	162,6
Maximum Pump Speed											
- Continuous	rpm	2300	2300	2300	2250	1900	1900	1900	1900	1700	1700
- Limited	rpm	3100	2900	2700	2700	2500	2500	2300	2300	2100	1900
Max. Continuous Pressure	bar	350	350	350	350	350	350	350	350	350	350
Max. Intermit. Peak Pressure	bar	400	400	400	400	400	400	400	400	400	400
Max. Torque at 350 bar	Nm	71	105	146	190	240	292	330	360	460	620
Weight											
- Without inlet fitting	kg	9,00	9,00	9,50	10,50	10,50	11,00	11,50	11,50	15,00	15,50
- With inlet fitting	kg	9,40	9,40	9,90	10,90	10,90	11,40	11,90	11,90	15,40	15,90
Overhang Torque											
- Without inlet fitting	N.m	8,70	8,75	8,82	11,00	11,12	11,72	11,79	11,82	17,80	17,92
- With inlet fitting	N.m	9,15	9,19	9,23	11,52	11,40	12,20	12,24	12,28	18,33	18,45
Rotation		CW,CCW	CW,CCW	CW,CCW	CW,CCW	CW,CCW	CW,CCW	CW,CCW	CW,CCW	CW,CCW	CW,CCW
Fluid		Mineral Based Hydraulic Oils									
Inlet & Outlet		3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	1"	1"

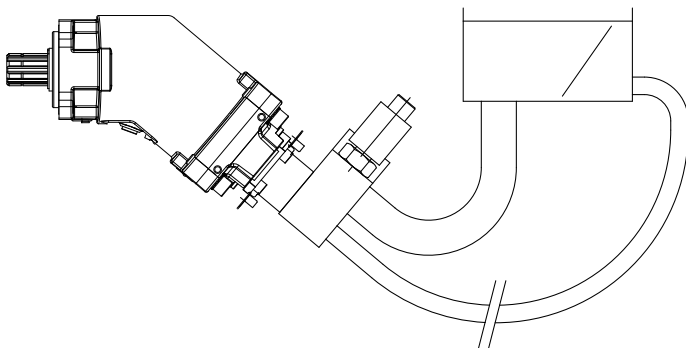

Overhang torque of PD-DIN pumps


		12	18	25	32	40	50	56	63	80	108
weight	without inlet fitting kg	12,81	12,82	12,89	14,06	14,70	14,80	14,84	14,86	18,42	18,50
	with inlet fitting 2" kg	13,23	13,33	13,37	15,12	15,17	15,24	15,28	15,30	18,95	19,01
torque	without inlet fitting N.m	16,33	16,38	16,42	19,14	18,97	20,07	20,10	20,11	27,18	27,30
	with inlet fitting 2" N.m	16,92	16,94	17,01	19,61	19,58	20,68	20,70	20,72	27,81	27,95

PD-DIN 12

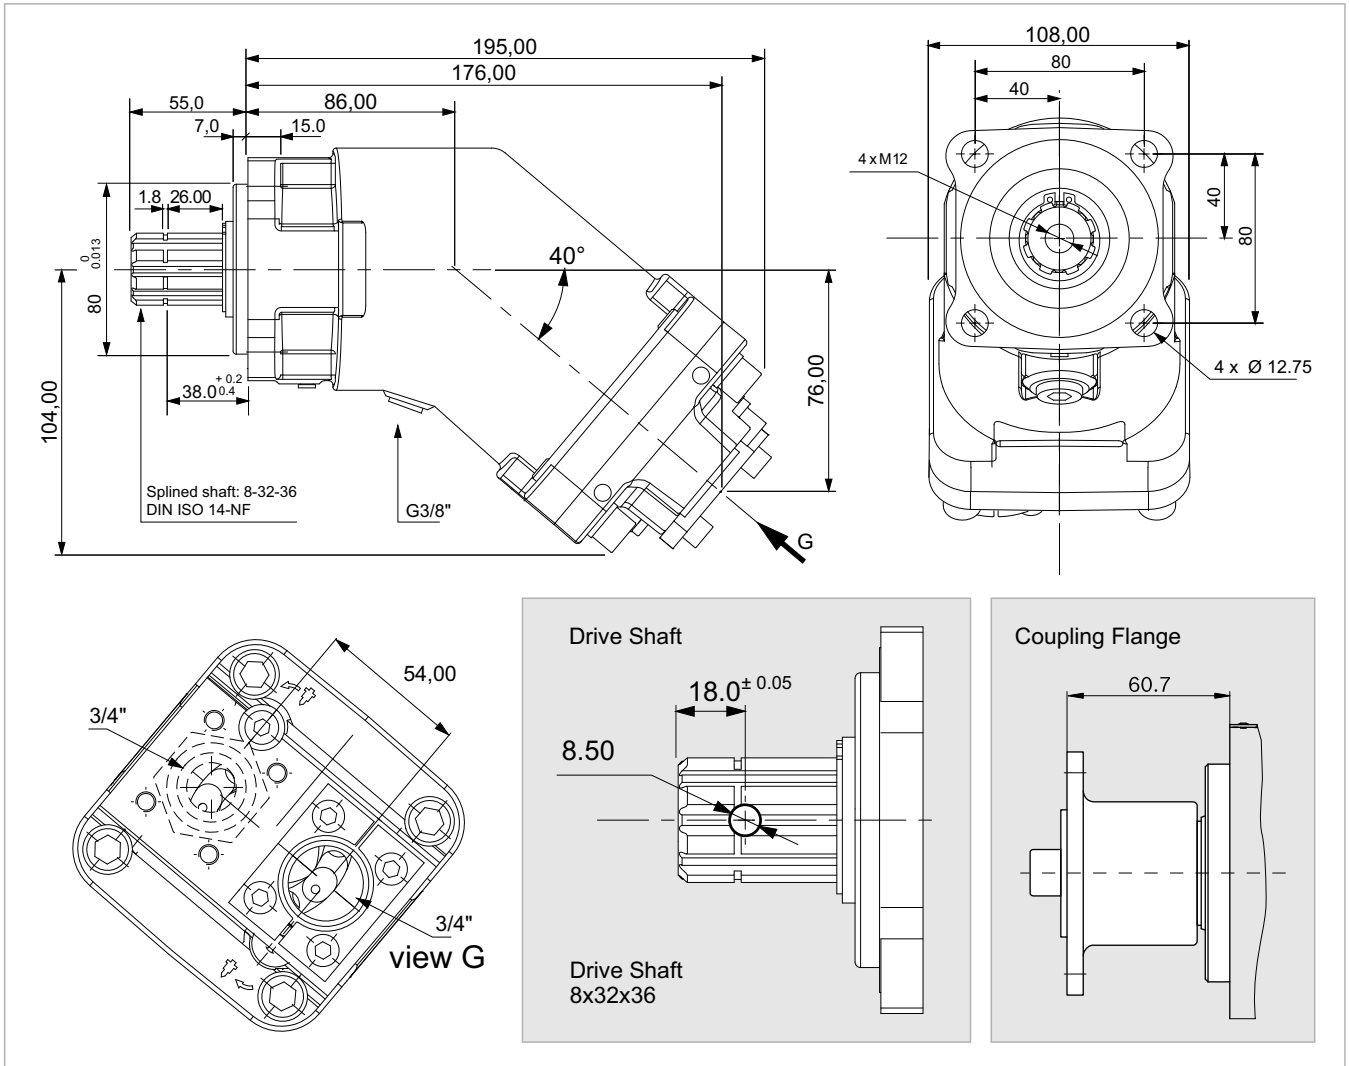


x 1000 rpm	12,00 cc
x 1500 rpm	18,00 cc
Max. Continuous Pump Speed	2300 rpm
Max. Limited Pump Speed	3100 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	71 Nm
Weight without inlet fitting	9,00 kg
Weight with inlet fitting	9,40 kg
Torque without inlet fitting	8,70 N.m
Torque with inlet fitting	9,15 N.m
Rotation	CW-CCW
Fluid	Min.B.Hyd.Oil
Inlet & Outlet	3/4"

Flow, Speed, Pressure List of PD-DIN 12

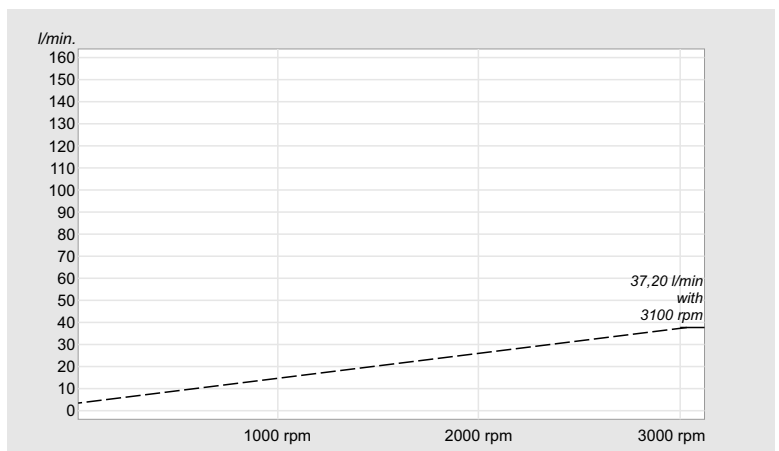


PD-DIN 18

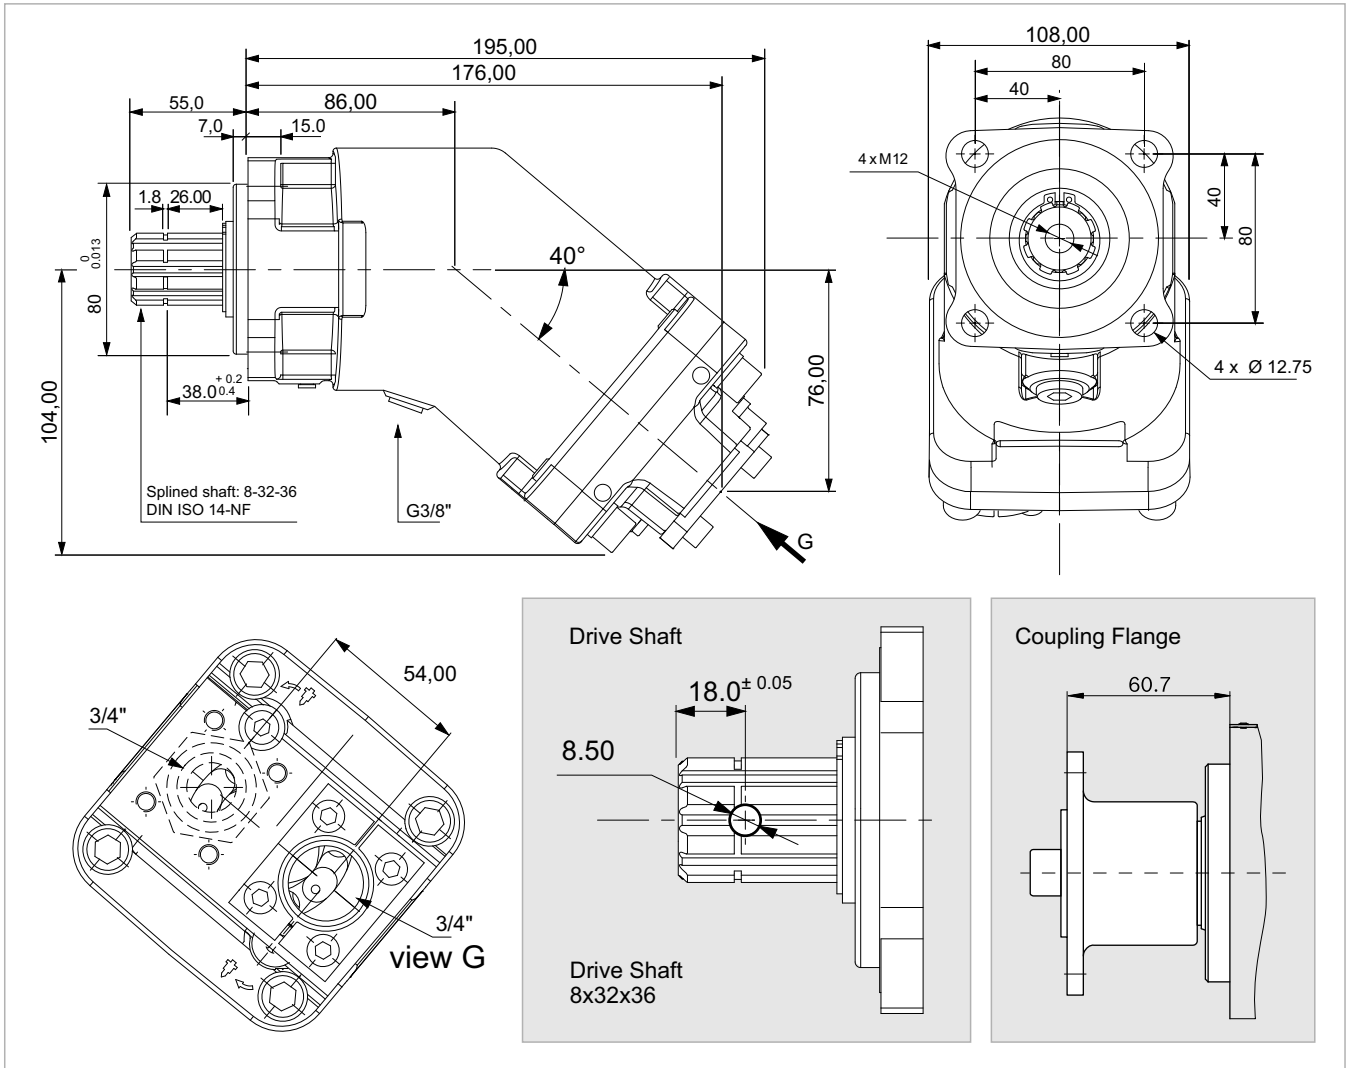


x 1000 rpm	18,00 cc
x 1500 rpm	27,00 cc
Max. Continuous Pump Speed	2300 rpm
Max. Limited Pump Speed	2900 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	105 Nm
Weight without inlet fitting	9,00 kg
Weight with inlet fitting	9,40 kg
Torque without inlet fitting	8,75 N.m
Torque with inlet fitting	9,19 N.m
Rotation	CW-CCW
Fluid	Min.B.Hyd.Oil
Inlet & Outlet	3/4"

Flow, Speed, Pressure List of PD-DIN 18

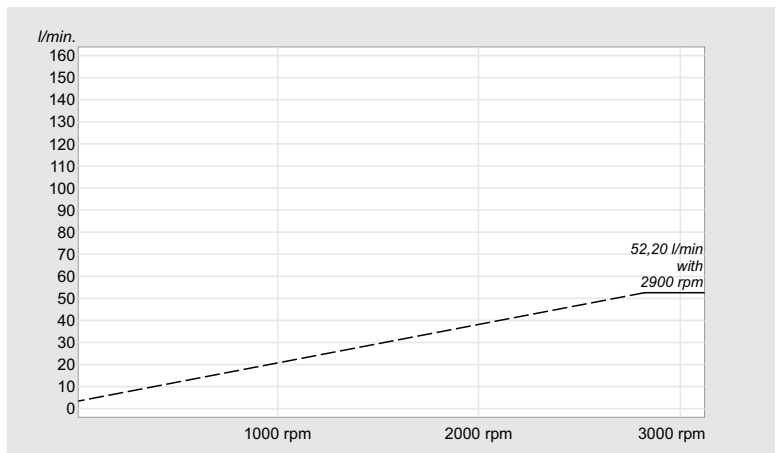


PD-DIN 25

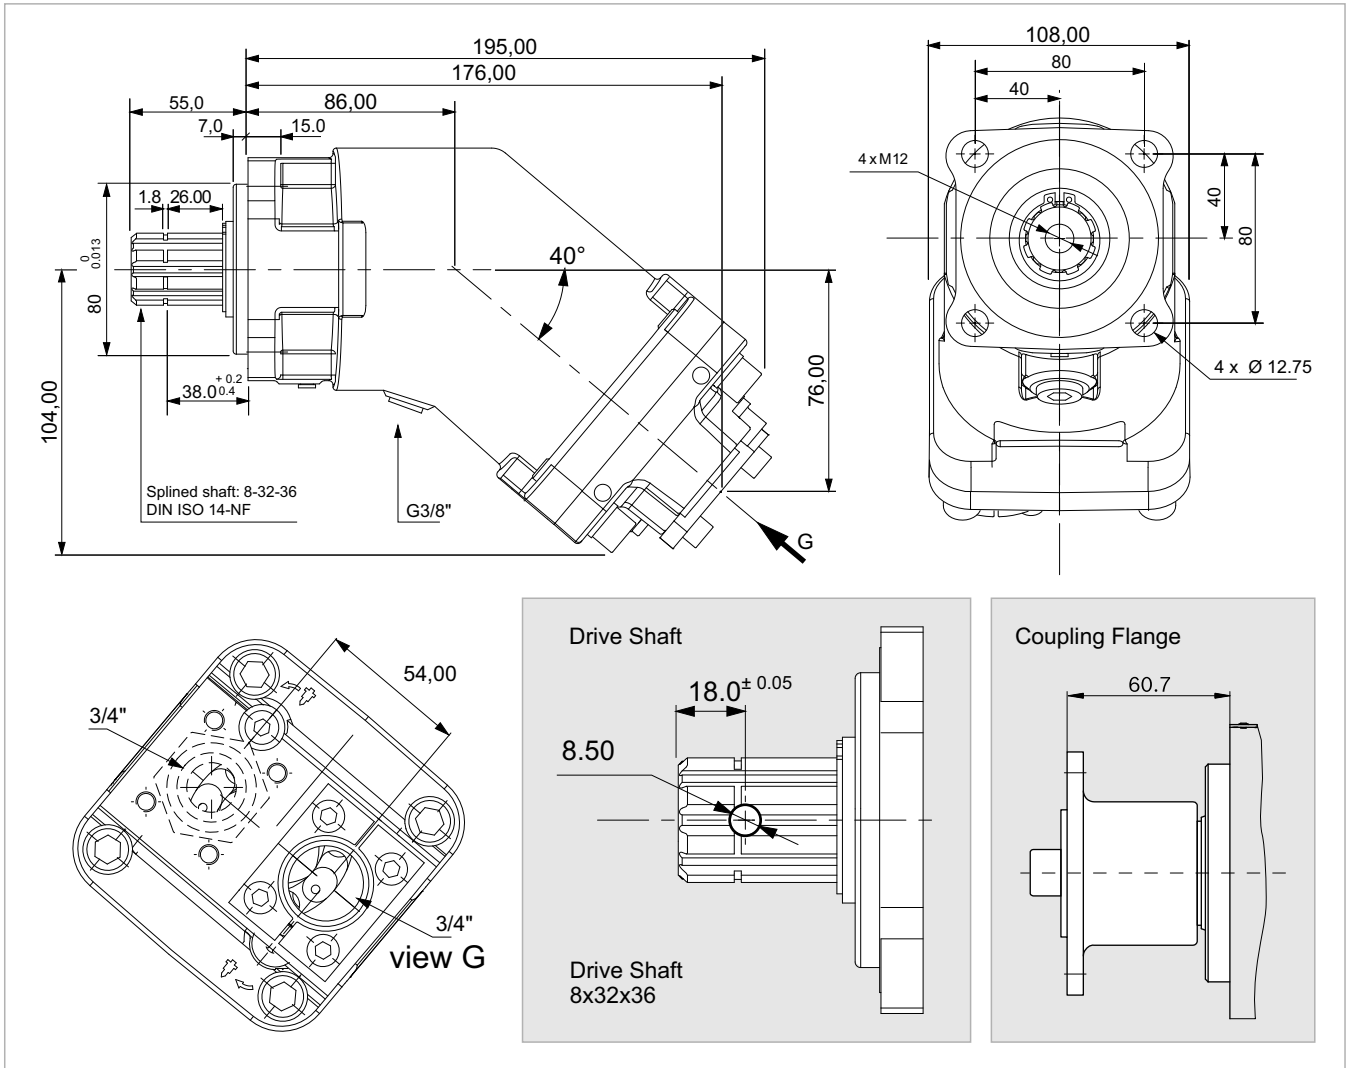


x 1000 rpm	25,00 cc
x 1500 rpm	37,50 cc
Max. Continuous Pump Speed	2300 rpm
Max. Limited Pump Speed	2700 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	146 Nm
Weight without inlet fitting	9,50 kg
Weight with inlet fitting	9,90 kg
Torque without inlet fitting	8,82 N.m
Torque with inlet fitting	9,23 N.m
Rotation	CW-CCW
Fluid	Min.B.Hyd.Oil
Inlet & Outlet	3/4"

Flow, Speed, Pressure List of PD-DIN 25

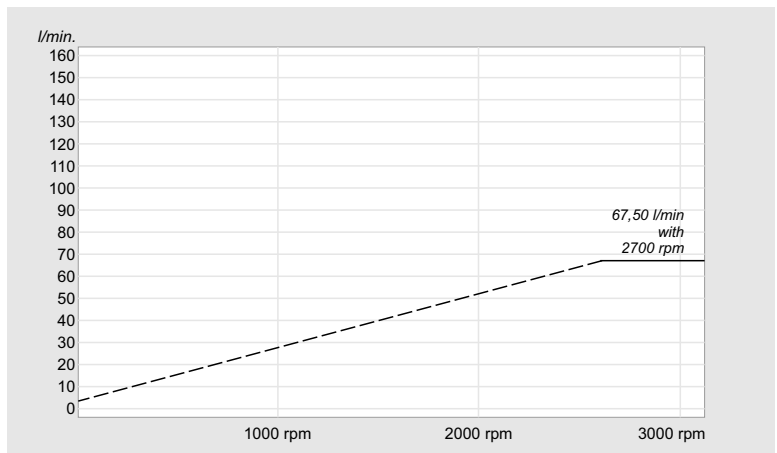


PD-DIN 32

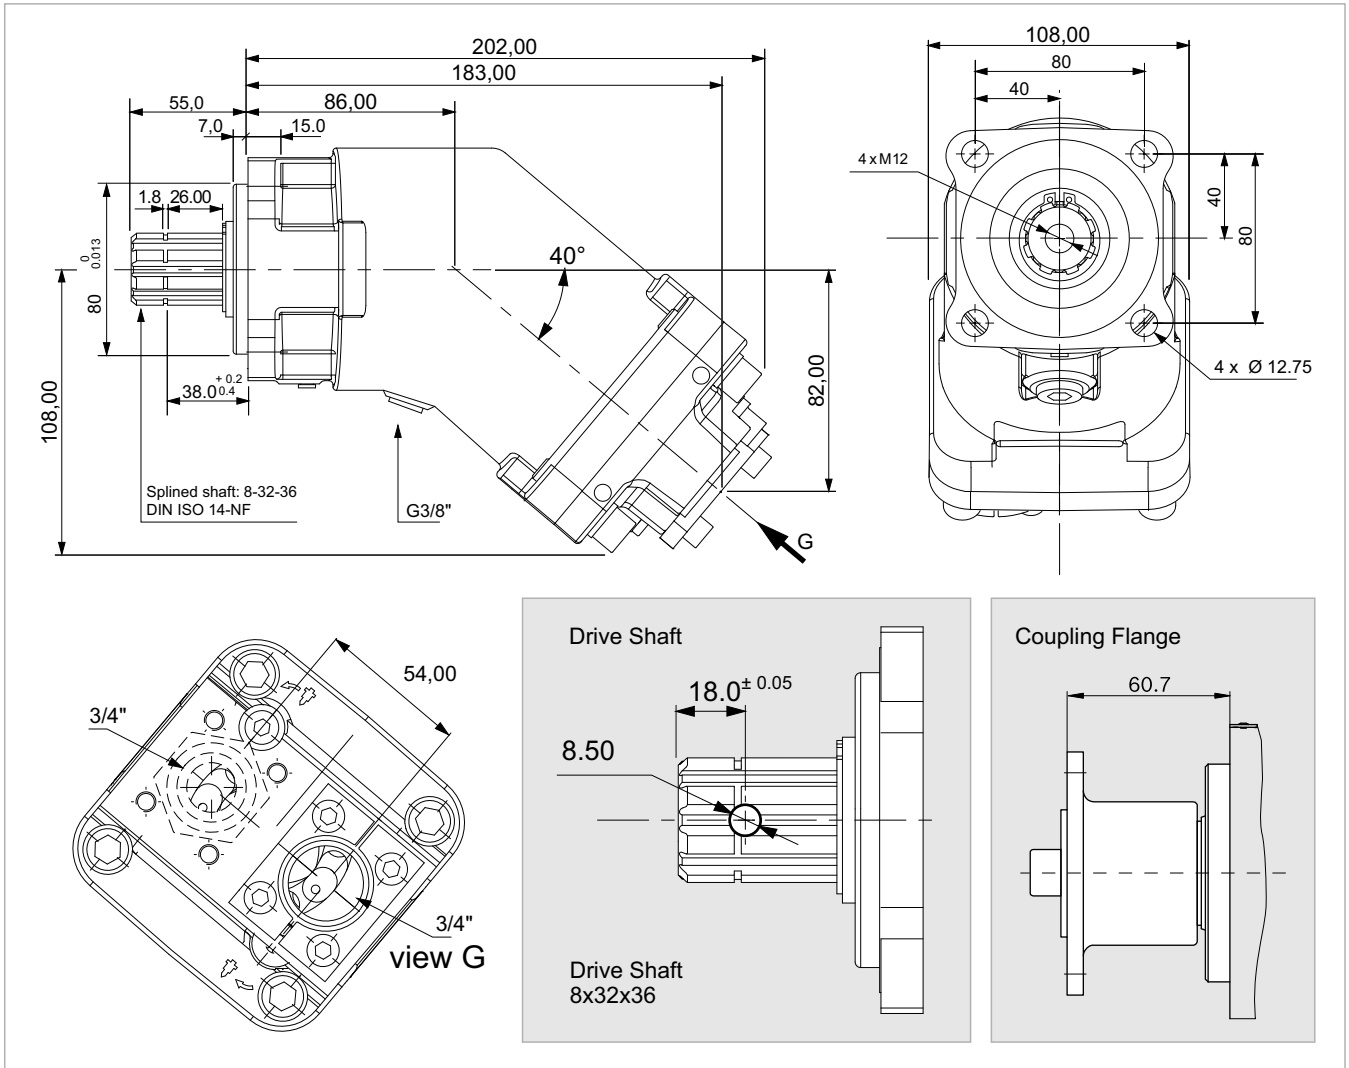


x 1000 rpm	32,00 cc
x 1500 rpm	48,00 cc
Max. Continuous Pump Speed	2250 rpm
Max. Limited Pump Speed	2700 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	190 Nm
Weight without inlet fitting	10,50 kg
Weight with inlet fitting	10,90 kg
Torque without inlet fitting	11,00 N.m
Torque with inlet fitting	11,52 N.m
Rotation	CW-CCW
Fluid	Min.B.Hyd.Oil
Inlet & Outlet	3/4"

Flow, Speed, Pressure List of PD-DIN 32

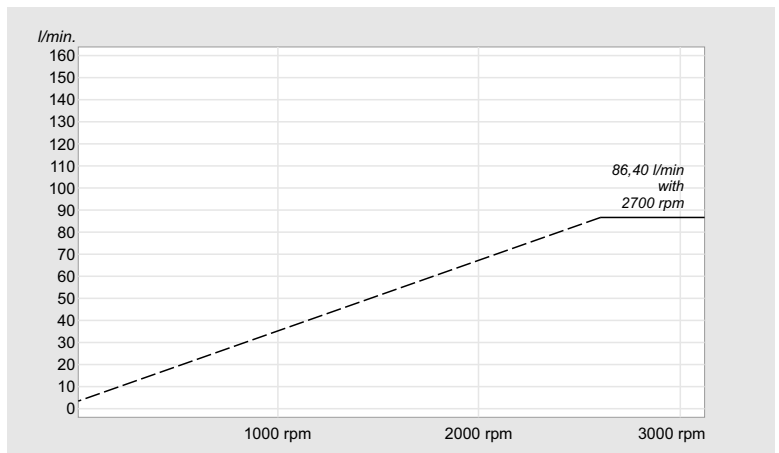


PD-DIN 40

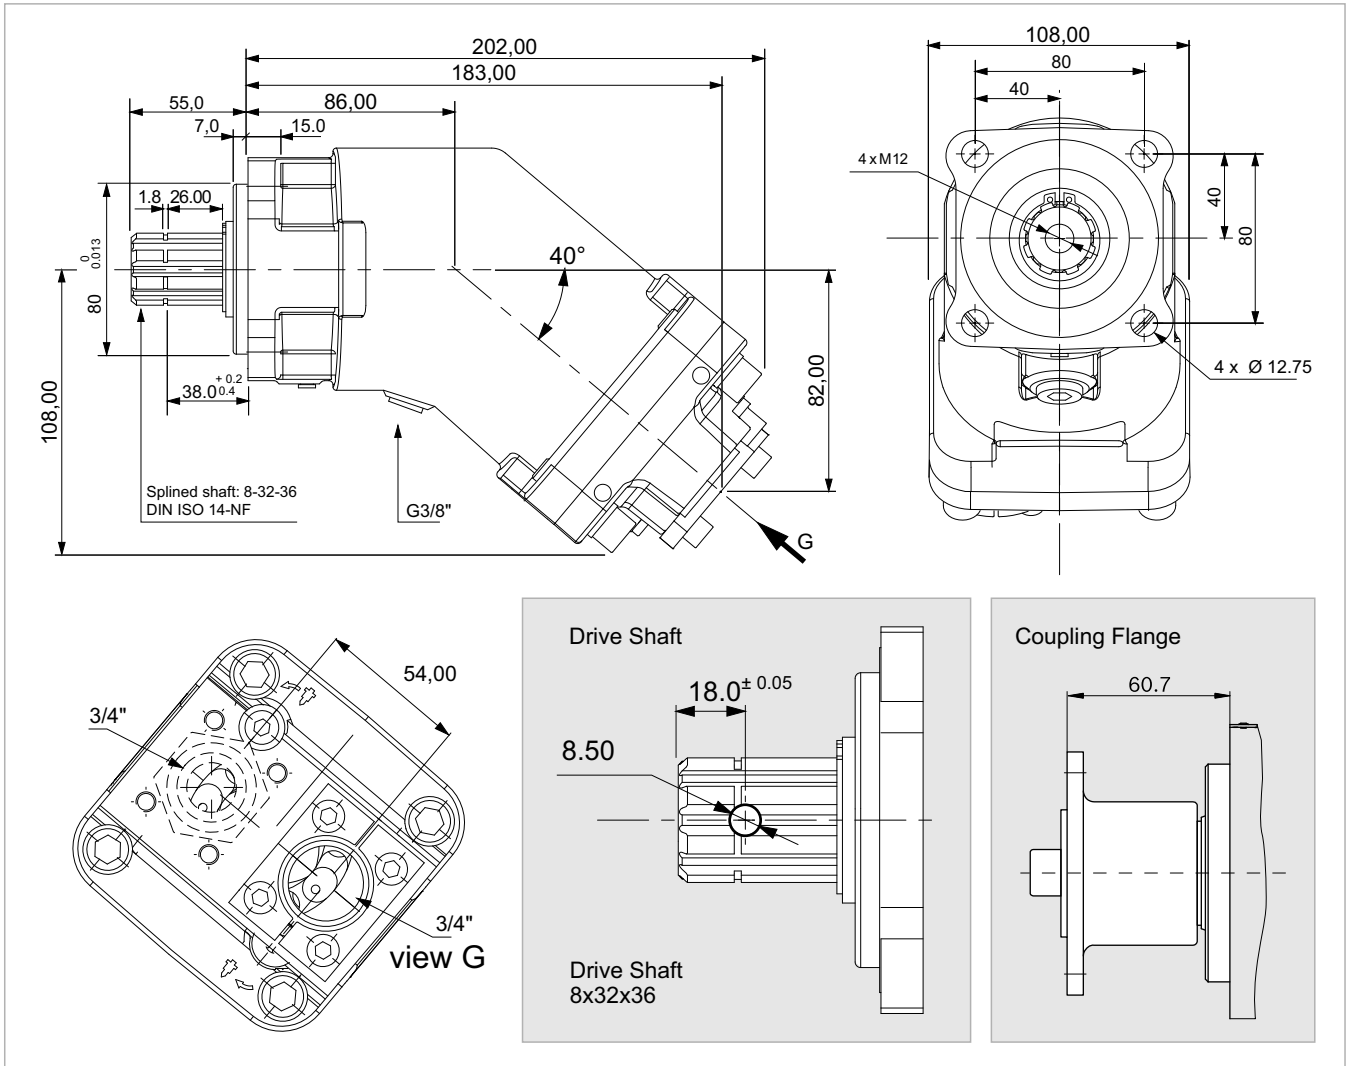


x 1000 rpm	40,20 cc
x 1500 rpm	60,30 cc
Max. Continuous Pump Speed	1900 rpm
Max. Limited Pump Speed	2500 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	240 Nm
Weight without inlet fitting	10,50 kg
Weight with inlet fitting	10,90 kg
Torque without inlet fitting	11,12 N.m
Torque with inlet fitting	11,40 N.m
Rotation	CW-CCW
Fluid	Min.B.Hyd.Oil
Inlet & Outlet	3/4"

Flow, Speed, Pressure List of PD-DIN 40

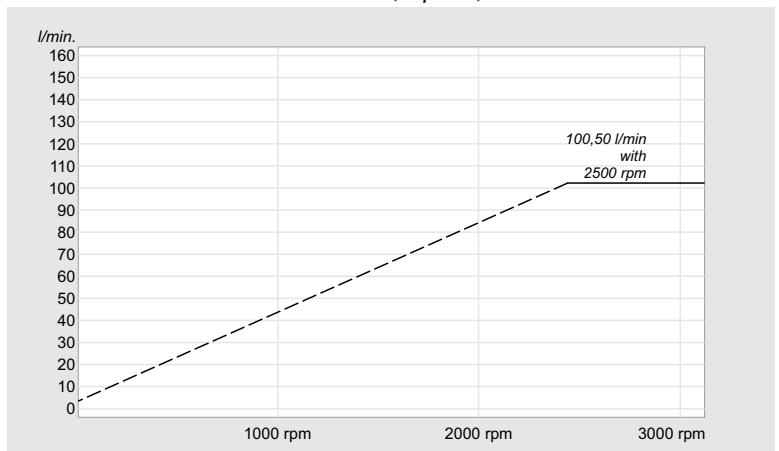


PD-DIN 50

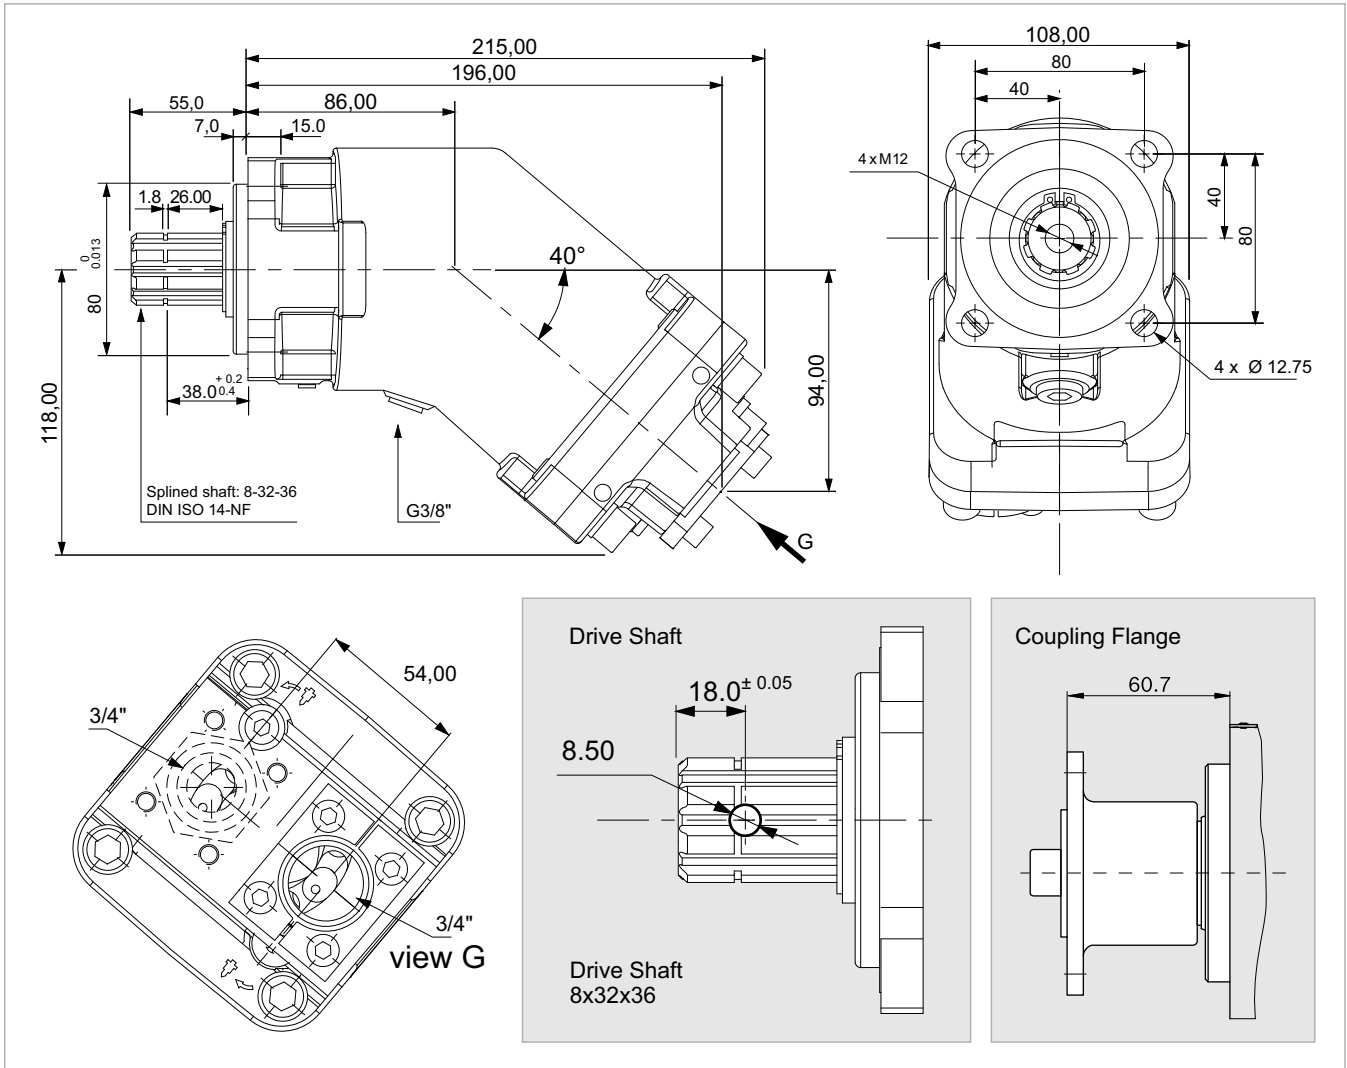


x 1000 rpm	50,00 cc
x 1500 rpm	75,00 cc
Max. Continuous Pump Speed	1900 rpm
Max. Limited Pump Speed	2500 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	292 Nm
Weight without inlet fitting	11,00 kg
Weight with inlet fitting	11,40 kg
Torque without inlet fitting	11,72 N.m
Torque with inlet fitting	12,20 N.m
Rotation	CW-CCW
Fluid	Min.B.Hyd.Oil
Inlet & Outlet	3/4"

Flow, Speed, Pressure List of PD-DIN 50

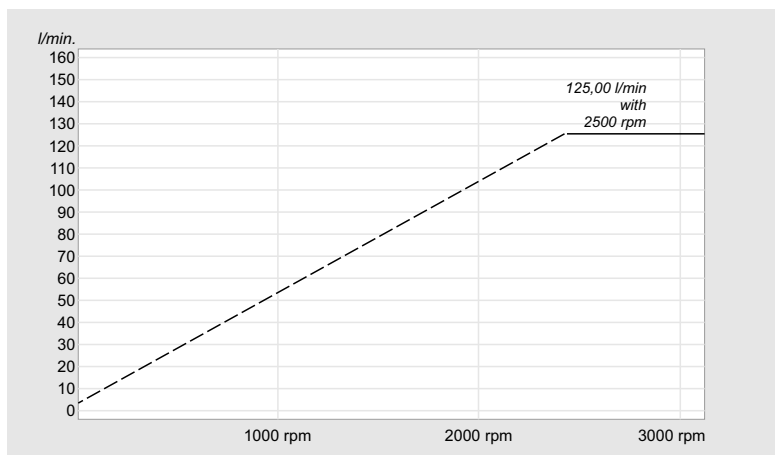


PD-DIN 56

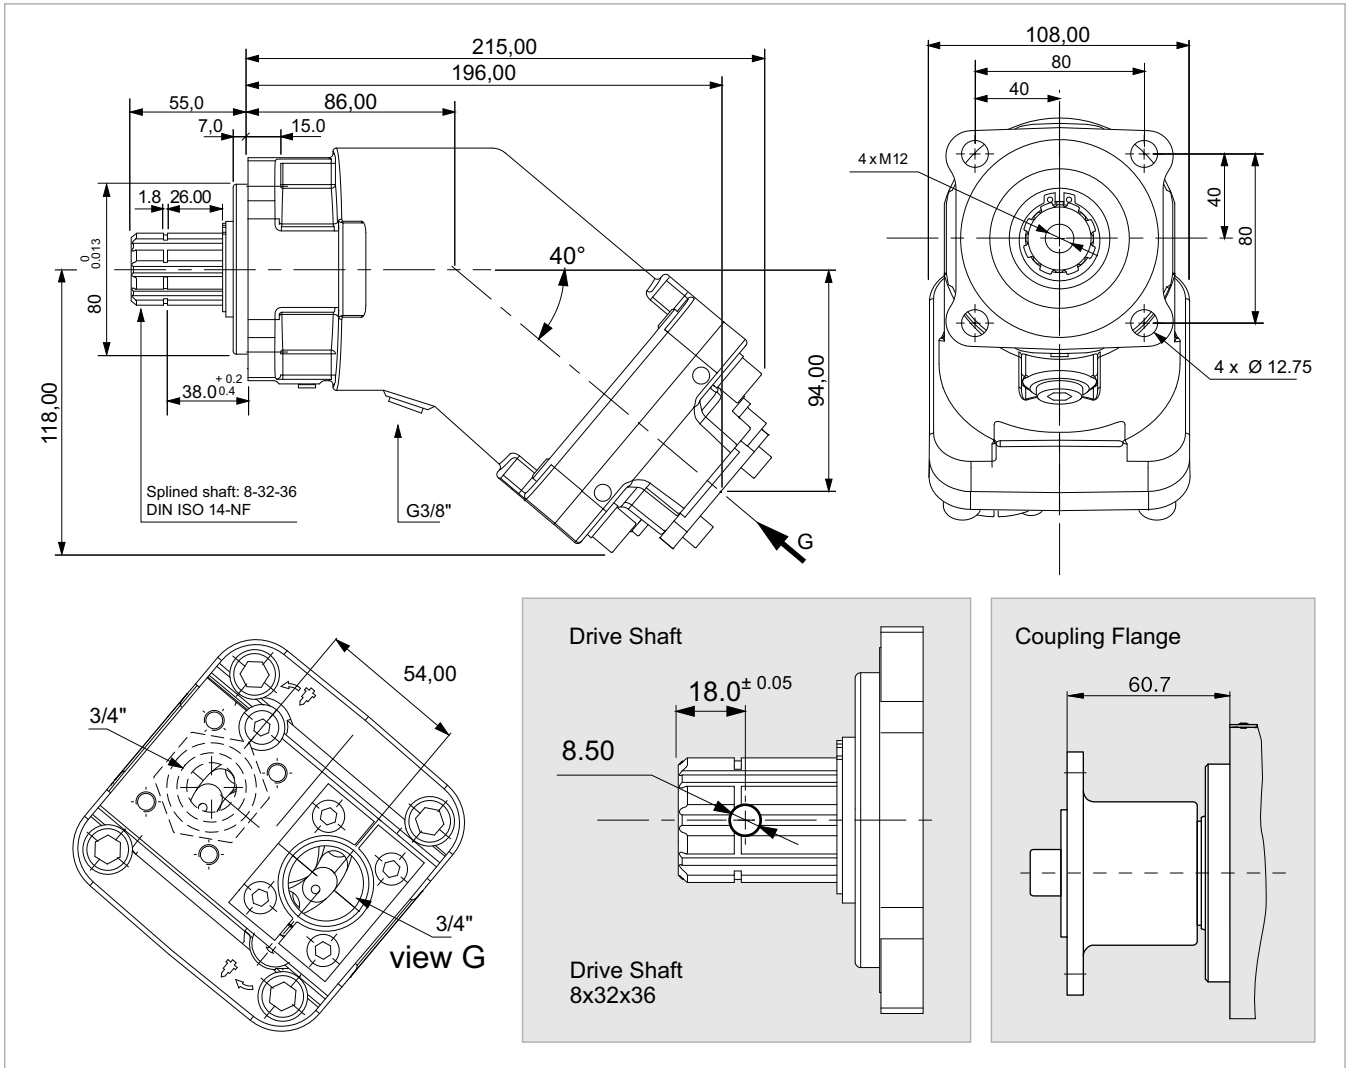


x 1000 rpm	56,40 cc
x 1500 rpm	84,60 cc
Max. Continuous Pump Speed	1900 rpm
Max. Limited Pump Speed	2300 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	330 Nm
Weight without inlet fitting	11,50 kg
Weight with inlet fitting	11,90 kg
Torque without inlet fitting	11,79 N.m
Torque with inlet fitting	12,24 N.m
Rotation	CW-CCW
Fluid	Min.B.Hyd.Oil
Inlet & Outlet	3/4"

Flow, Speed, Pressure List of PD-DIN 56

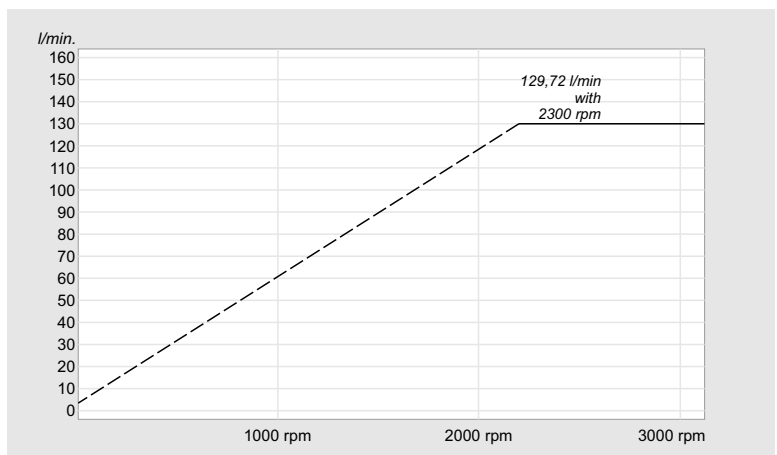


PD-DIN 63

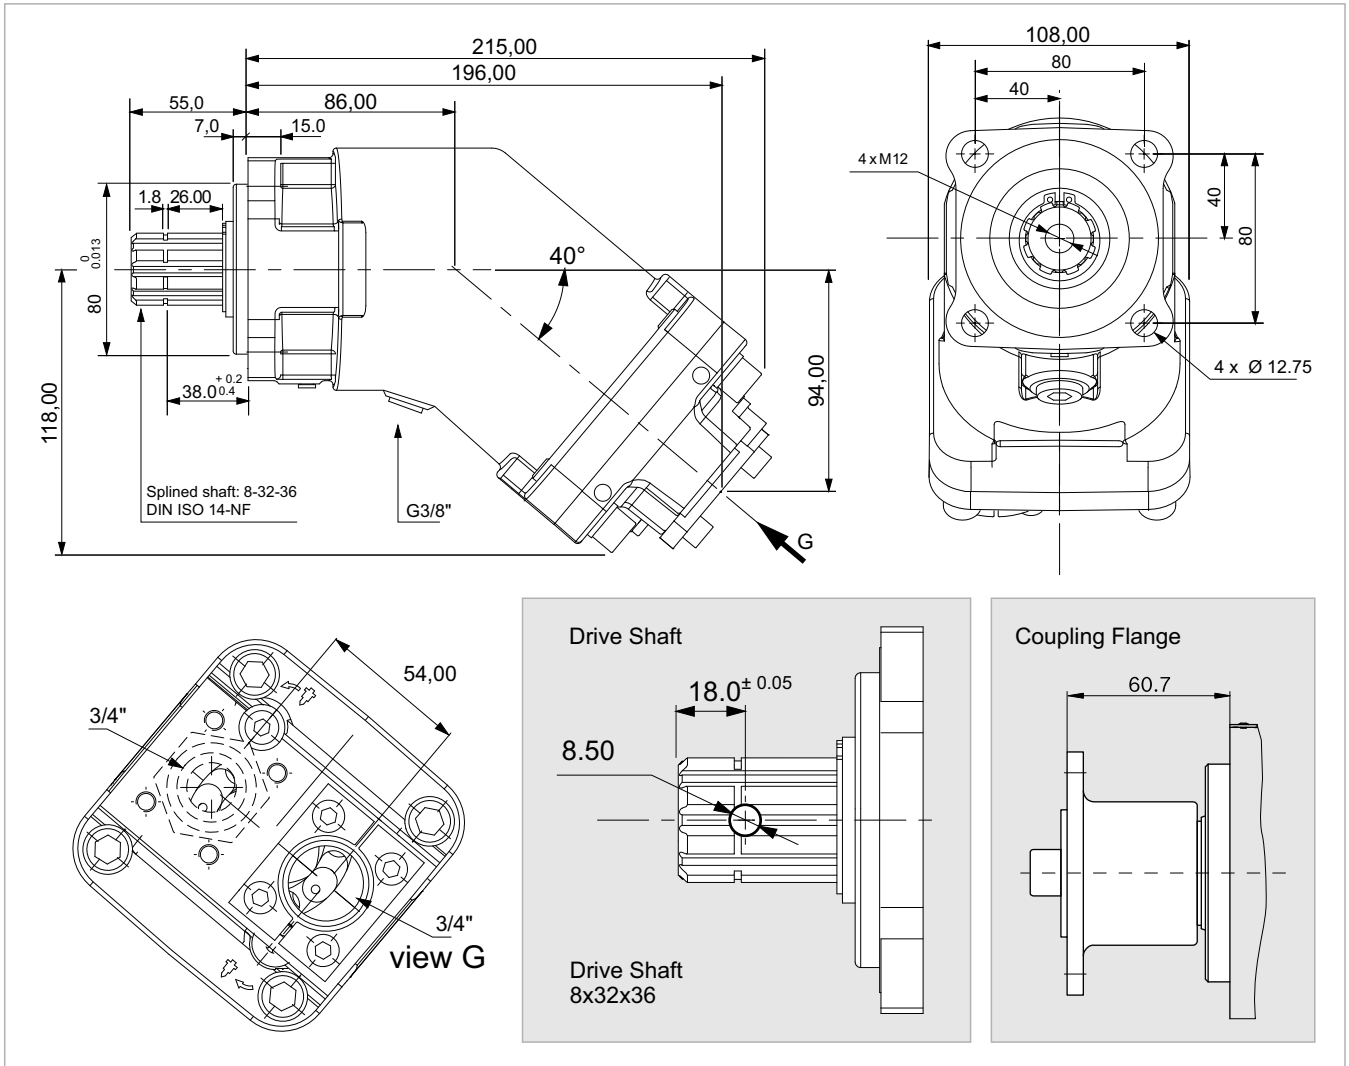


x 1000 rpm	63,00 cc
x 1500 rpm	94,50 cc
Max. Continuous Pump Speed	1900 rpm
Max. Limited Pump Speed	2300 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	360 Nm
Weight without inlet fitting	11,50 kg
Weight with inlet fitting	11,90 kg
Torque without inlet fitting	11,82 N.m
Torque with inlet fitting	12,28 N.m
Rotation	CW-CCW
Fluid	Min.B.Hyd.Oil
Inlet & Outlet	3/4"

Flow, Speed, Pressure List of PD-DIN 63

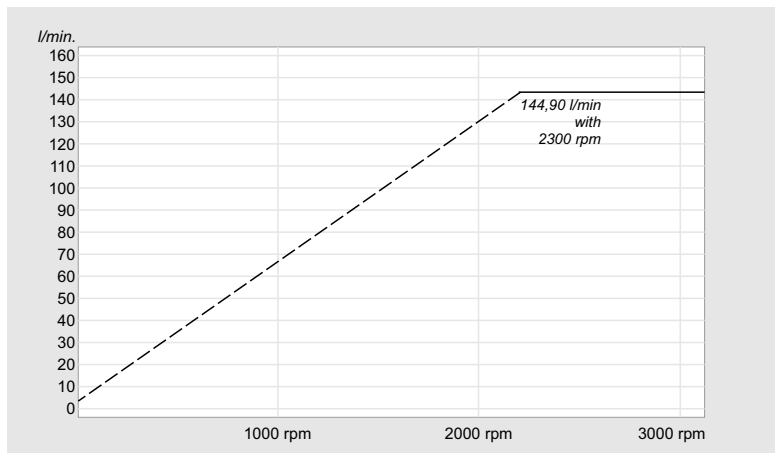


PD-DIN 80

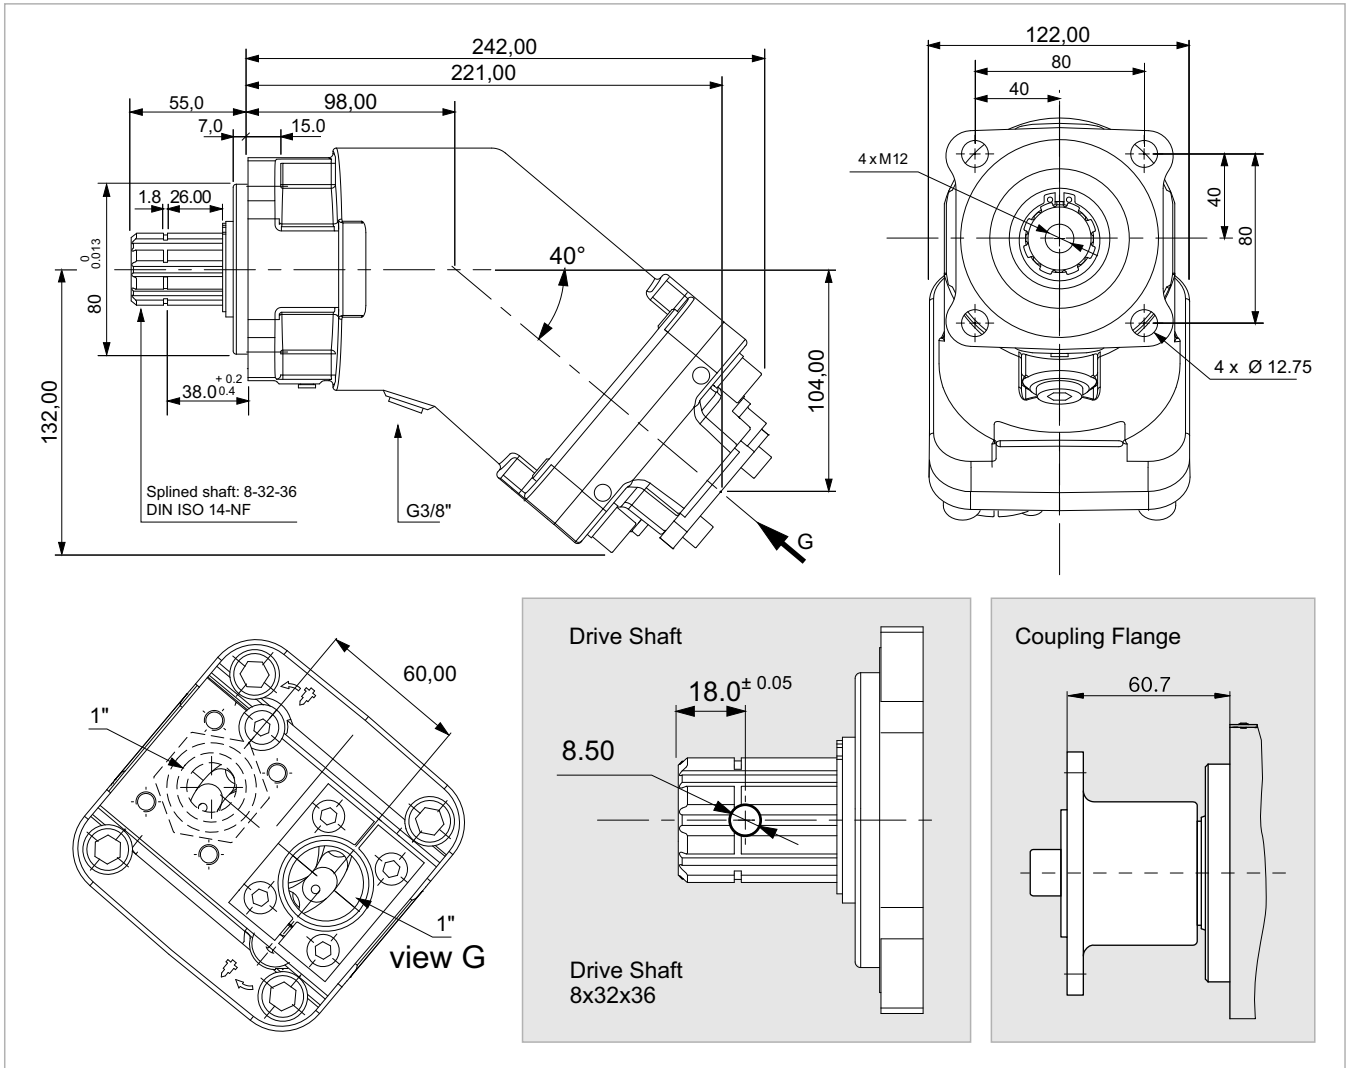


x 1000 rpm	80,00 cc
x 1500 rpm	120,00 cc
Max. Continuous Pump Speed	1700 rpm
Max. Limited Pump Speed	2100 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	460 Nm
Weight without inlet fitting	15,00 kg
Weight with inlet fitting	15,40 kg
Torque without inlet fitting	17,80 N.m
Torque with inlet fitting	18,33 N.m
Rotation	CW-CCW
Fluid	Min.B.Hyd.Oil
Inlet & Outlet	1"

Flow, Speed, Pressure List of PD-DIN 80

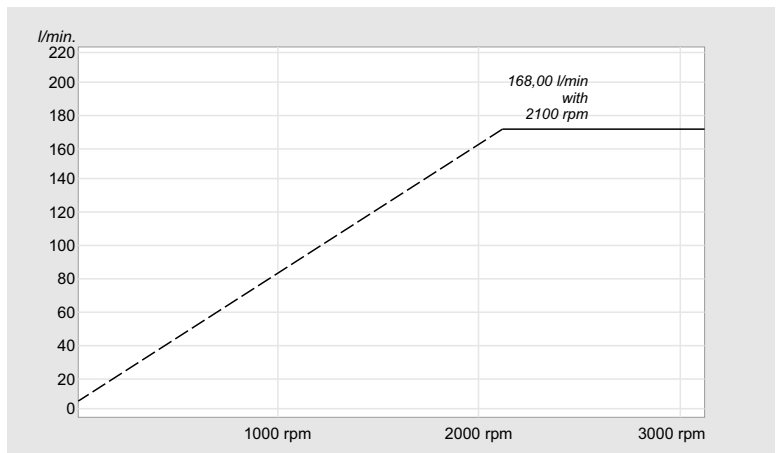


PD-DIN 108


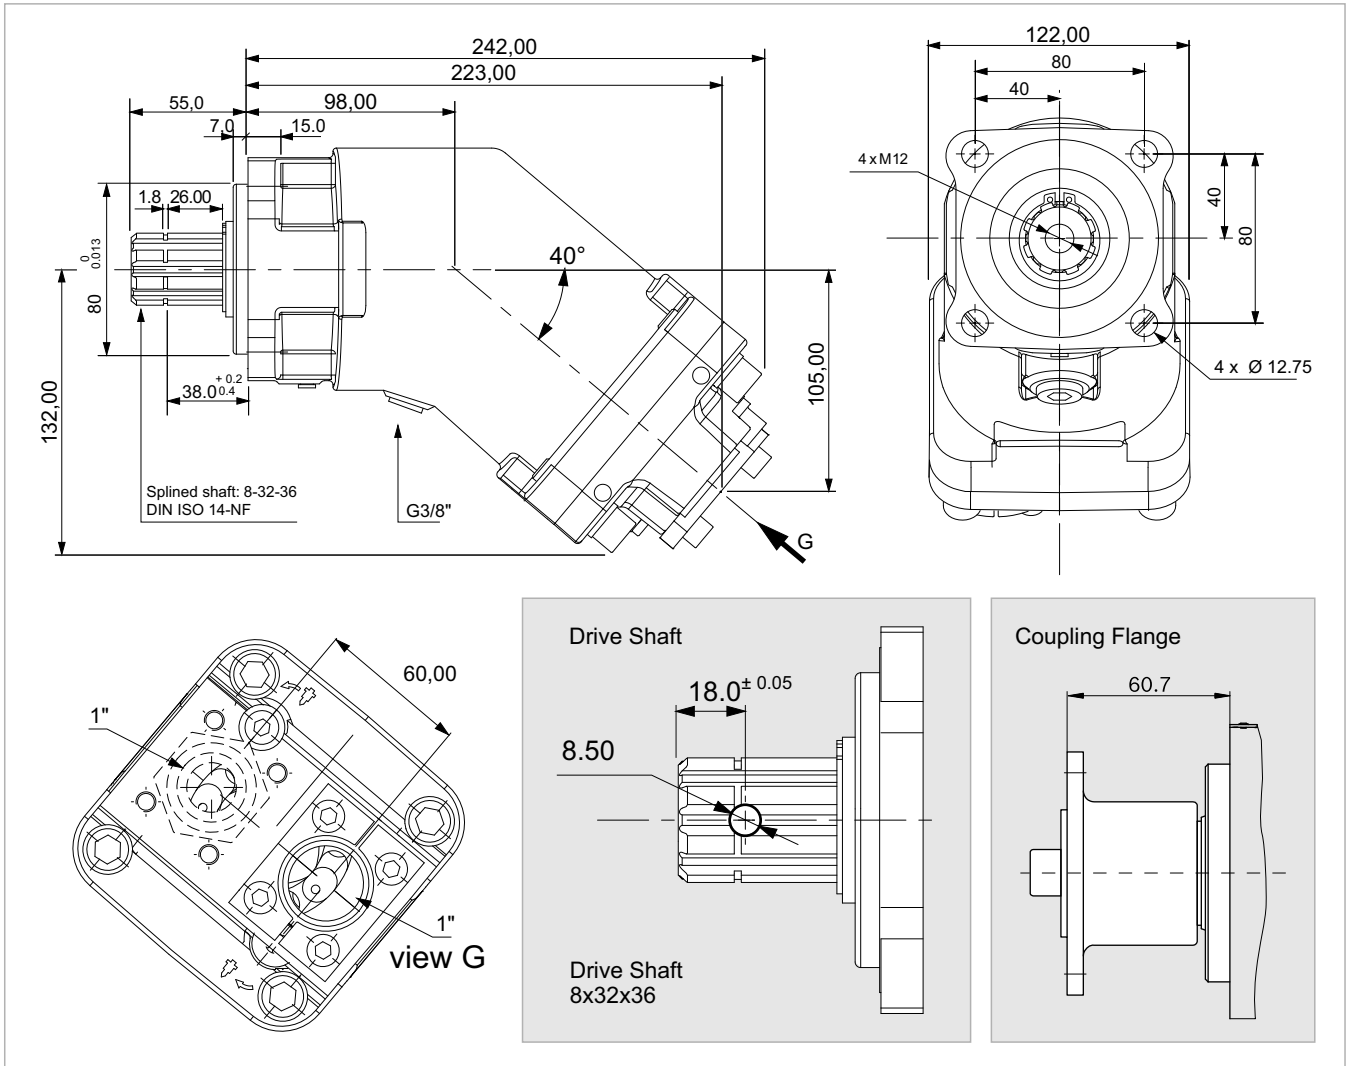


x 1000 rpm	108,40 cc
x 1500 rpm	162,60 cc
Max. Continuous Pump Speed	1700 rpm
Max. Limited Pump Speed	1900 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	620 Nm
Weight without inlet fitting	15,50 kg
Weight with inlet fitting	15,90 kg
Torque without inlet fitting	17,92 N.m
Torque with inlet fitting	18,45 N.m
Rotation	CW-CCW
Fluid	Min.B.Hyd.Oil
Inlet & Outlet	1"

Flow, Speed, Pressure List of PD-DIN 108

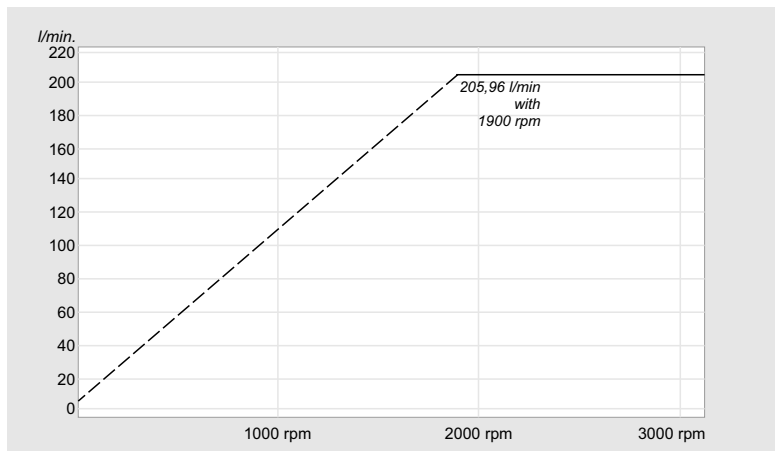

Changing the Direction of Rotation

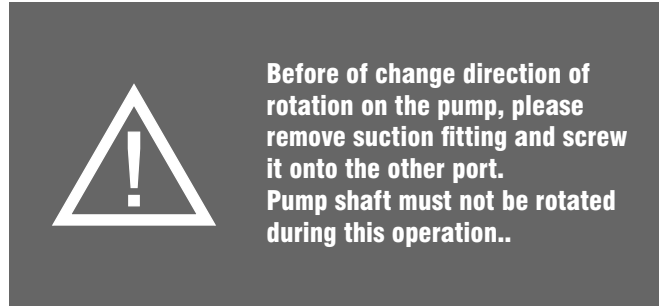
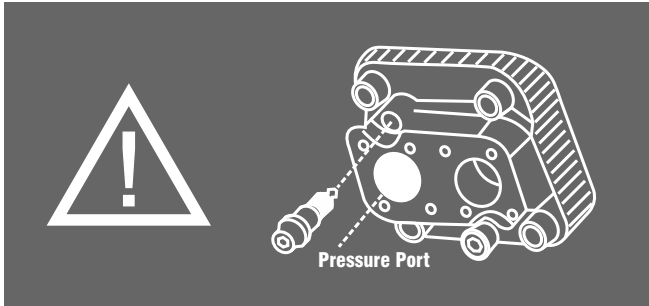


!! CHECK THE ROTATION FROM THE POWER TAKE OFF
!! THE ROTATION DIRECTION OF THE PUMP

Left Default delivered. Right Change rotation.

HOW TO CHANGE ROTATION OF THE PD-DIN PUMP;

- Remove the inlet fitting with split flange,
- Remove the setting screw,
- Remove the plug,
- Put the setting screw where the plug was,
- Put the plug where the setting screw was,
- Put seal on the inlet fitting, then the inlet fitting on the side where the plug is, and fix with the split flange, Tighten with the screws.

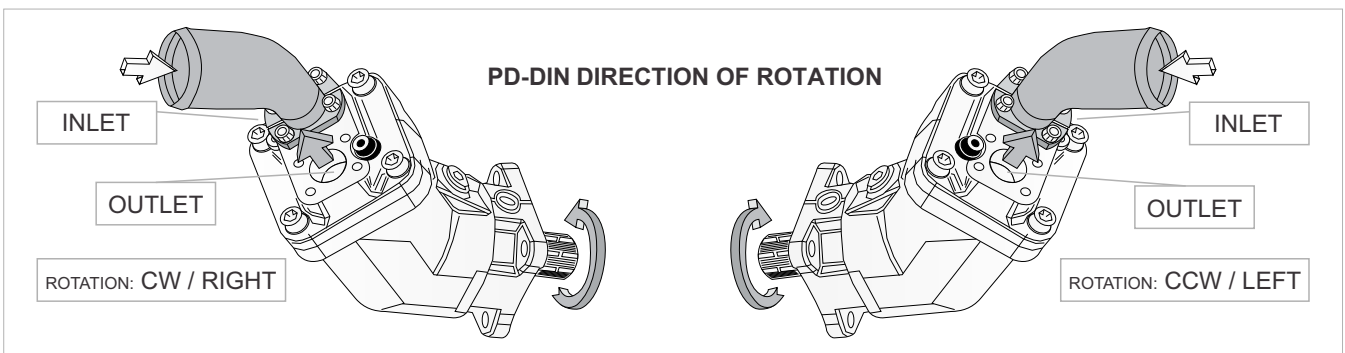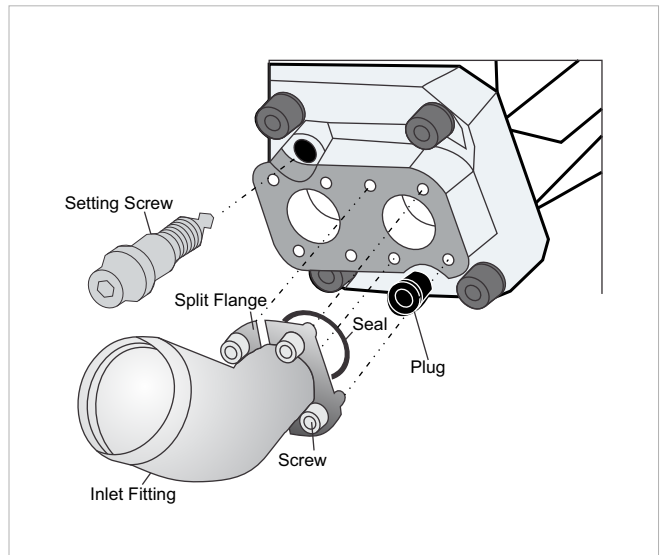

NOTE I

The Inlet Fitting is pre-assembled on delivery and must be tightened to the torque specified for the thread size before installation.

NOTE II

To change the direction of rotation of the PD-DIN Bent Axis Pump, you must change the pressure connection from to right port to the left port.

NOTE III

If the pump drive shaft moves while making the change, the PD-DIN Bent Axis Pump may be damaged. After unscrewing the pressure connection, do not turn the drive shaft of the pump!


FLUID

Please check the following recommendations:
Mineral oil

Viscosity	20 to 40 cSt
Min. viscosity	5 cSt
Viscosity for correct operation	10 to 400 cSt
Recommended filtration	10µ absolute class 9 NAS 1638 class 6 SAE class 18/15 ISO
Max temp.	100° C



Inlet Fittings, Accessories




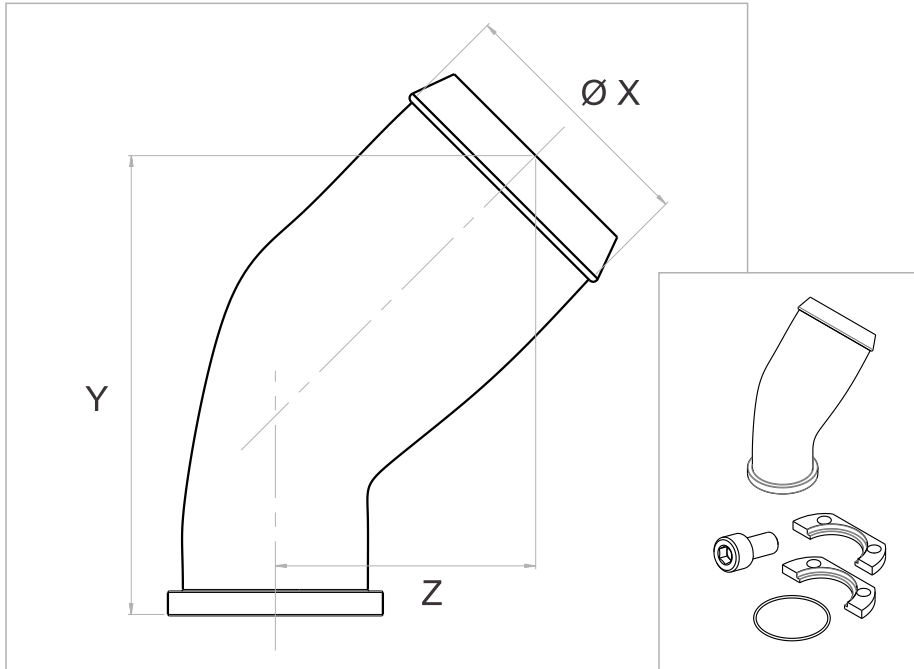


45° elbow fittings

Ø hose	1 ½"	1 ¾"	2 ½"
Ø X	39	46	64
Y	91	91	125
Z	46	46	62

90° elbow fittings

Ø hose	1 ½"	2"	2 ½"
Ø X	39	51	64
Y	58	64	71
Z	80	80	87

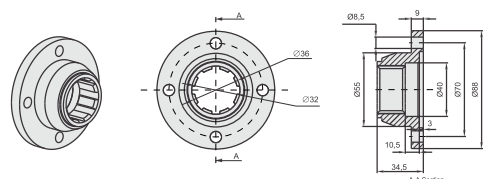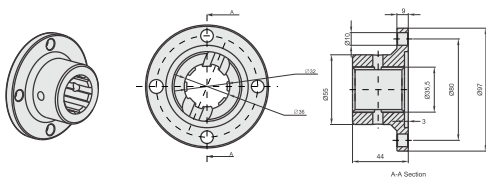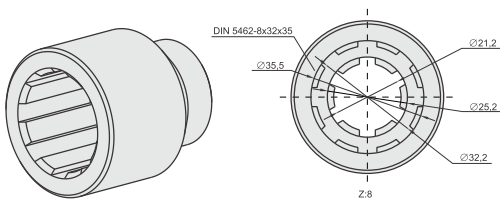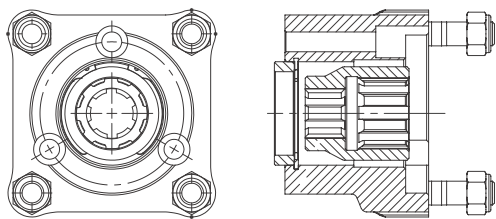

Inlet Fittings & Installation Parts

- Split Flange
- Seal
- Screw



By-Pass Valves

- 12 V
- 24 V



Hydraulic Adapters

- PTO Piston Pump Adapter
- PTO Gear Pump Adapter
- Long / Short Adapter



Flanges

- 1120 (6 Spline)
- 1120 (8 Spline)
- 1300 (6 Spline)
- 1300 (8 Spline)



Couplers

- 6 x 8 Couplar
- 6 x 8 Couplar (Long)
- 8 x 8 Couplar
- 8 x 8 Couplar (Long)

Installation & User Guide

The PD-DIN pumps fitted with a rubber front seal

INSTALLATION

PD-DIN pumps are direct mounting on the PTO.
Grease the splined shaft before installation. Do not tap the gear wheel/driver into position.

Remove any mounted screws on the pump.

The PD-DIN was delivered with protective covers and plastic/threaded plugs.
It should be removed before of install. Please check seals and surfaces. If sealing or other surfaces damaged please contact your responsible Service Partner.

Start up and run the pump at medium speed (800 to 1000 rpm at the PTO) until the oil flowing out of the pump. (There are no more air bubbles.)

OIL SUPPLY

Oil and supply line should be clean, and the supply line is airtight.

SUCTION LINE

Connect the suction line, tighten the suction connection bolts in diometric pairs.
Connect the pressure line.

REPAIR

We offers a comprehensive range of services for the repair of our Bent Axis Pumps.

Repairs to the PD-DIN Bent Axis Pump may only be performed by authorized, skilled and instructed personnel. Only use original and pre-installed our PD-DIN spare parts from supplied to Manufacturer..

Tested and pre-installed PD-DIN pumps successful repair requiring only little time.

SPARE PARTS

The spare parts list and the PD-DIN pump order specific.

When ordering spare parts, quote the material and complete Ordering code number of the PD-DIN Bent Axis Pump as well as the right numbers of the spare parts.


RISK OF DAMAGE!

Do not touch the drive shaft of the PD-DIN Bent Axis Pump
Do not touch sensor, valves and fittings
Do not touch sealing surfaces.

DIMENSIONS & WEIGHTS

		12	18	25	32	40	50	56	63	80	108
- Without inlet fitting	kg	9,00	9,00	9,50	10,50	10,50	11,00	11,50	11,50	15,00	15,50
- With inlet fitting	kg	9,40	9,40	9,90	10,90	10,90	11,40	11,90	11,90	15,40	15,90

Address all questions regarding spare parts to your responsible
Our Service Partner or the technical service department of the
manufacture's plant / factory for the PD-DIN Bent Axis Pumps.

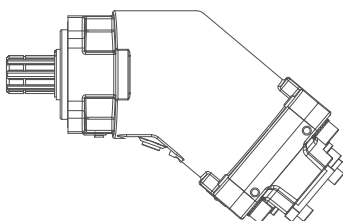

SAFA

HYDRAULICS



PD-DIN
Bent Axis Pumps



MD-DIN
Bent Axis Motor



PA-SAE
Bent Axis Pumps



MA-SAE
Bent Axis Motor




PS-ISO
Bent Axis Pumps



MS-ISO
Bent Axis Motor



PD Dual
Dual Flow Pumps



MF Fixed
Bent Axis Motor



PV
Variable Disp.
Piston Pumps

SAFA HYDRAULICS

ADDRESS:

Fevzi akmak Mahallesi 10465. Sk. Karatay | Konya / Turkey

TELEPHONE:

+90 332 342 10 21, +90 534 234 63 89, +90 539 592 71 71

FAX:

+90 332 342 45 71

E-MAIL:

info@safahydraulic.com

www.safahydraulic.com

In 6 Continents, 58 Countries Fevzi akmak Mh. 10465. Sk. Karatay +90 332 342 10 21

f t i l p

SAFA
HYDRAULICS

Home

About Us

Pumps & Motors

Catalogs

Applications

Quality

Contact Us

Q

CONTACT US

Home | Contact Us

Contact Us

Contact with SAFA Hydraulics



info@safahydraulic.com

www.safahydraulic.com